
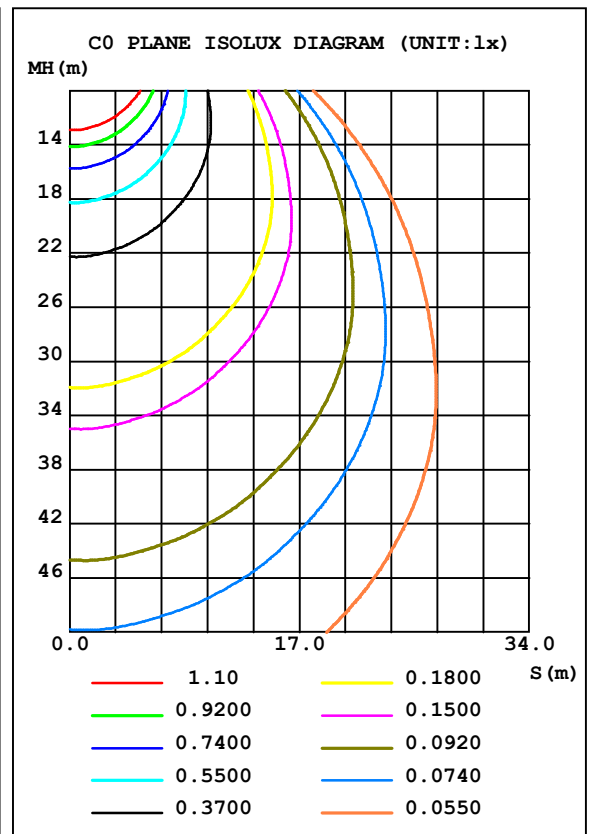


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.63 lm/W			
MODEL		I _{max} (cd)	184.2	S/MH (C0/180)	1.24
NOMINAL POWER (W)	6	LOR (%)	101.7	S/MH (C90/270)	1.31
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	416.30	η UP, DN (C0-180)	0.4, 52.9
NOMINAL FLUX (lm)	409.443	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 47.9
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230.0	η down (%)	100.8	CIBSE SHR MAX	1.35

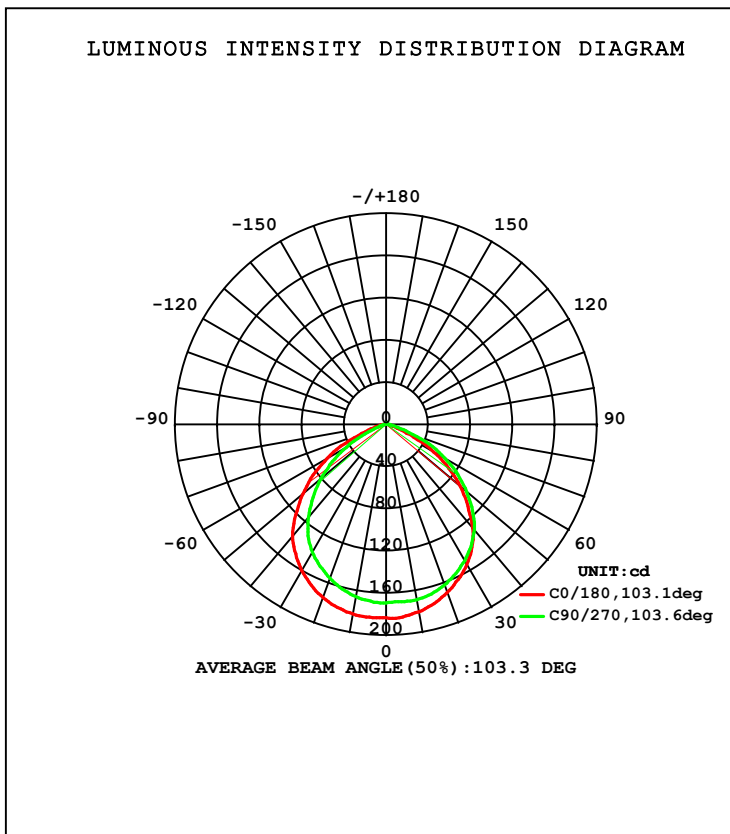

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: gg
 Test Date: 2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 8.920m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	180.3	172.4	168.9	165.4	182.6	172.0	166.0	161.3	0- 10	16.31	16.31	3.92,3.98
20	169.7	165.5	162.1	157.8	175.0	163.4	155.6	150.2	10- 20	46.88	63.19	15.2,15.4
30	153.4	152.4	149.3	143.2	160.0	148.9	140.0	134.1	20- 30	71.17	134.4	32.3,32.8
40	127.9	132.7	130.4	124.3	137.9	127.4	114.5	110.0	30- 40	85.33	219.7	52.8,53.7
50	92.13	100.6	100.2	94.92	103.3	92.49	81.02	78.52	40- 50	83.75	303.4	72.9,74.1
60	52.41	60.24	64.43	62.32	64.64	50.44	43.90	42.26	50- 60	65.92	369.4	88.7,90.2
70	13.28	17.43	23.60	22.99	21.64	12.77	9.569	10.38	60- 70	33.66	403.0	96.8,98.4
80	2.209	3.548	4.532	4.766	4.031	2.316	1.465	1.526	70- 80	8.513	411.5	98.9,101
90	0.0568	0.0885	0.2965	0.2753	0.0768	0.0412	0.0464	0.0412	80- 90	1.228	412.8	99.1,101
100	0.0874	0.0772	0.0515	0.0617	0.0930	0.1236	0.1391	0.1339	90-100	0.0745	412.8	99.2,101
110	0.2573	0.1904	0.1543	0.1544	0.2523	0.2937	0.3247	0.3092	100-110	0.1695	413.0	99.2,101
120	0.5452	0.4372	0.4014	0.3906	0.5097	0.5664	0.5923	0.5665	110-120	0.3573	413.4	99.3,101
130	0.8184	0.7152	0.6534	0.6274	0.7984	0.8443	0.8495	0.8083	120-130	0.5577	413.9	99.4,101
140	1.055	0.9573	0.8696	0.8285	1.040	1.076	1.050	1.014	130-140	0.6708	414.6	99.6,101
150	1.184	1.137	1.045	0.9933	1.241	1.225	1.199	1.158	140-150	0.6649	415.3	99.7,101
160	1.311	1.229	1.163	1.137	1.369	1.333	1.292	1.266	150-160	0.5528	415.8	99.9,102
170	1.420	1.333	1.312	1.266	1.467	1.410	1.364	1.323	160-170	0.3674	416.2	100,102
180	1.493	1.421	1.390	1.328	1.539	1.472	1.405	1.369	170-180	0.1315	416.3	100,102
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.21	1.21	1.21	1.18	1.18	1.18	1.12	1.12	1.12	1.08	1.08	1.08	1.03	1.03	1.03	1.01
1.0	1.08	1.05	1.01	1.06	1.03	.00	1.01	.99	.96	.97	.95	.93	.94	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.91	.86	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.84	.77	.72	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.64	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.68	.60	.54	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.44
7.0	.56	.48	.42	.56	.48	.42	.54	.47	.42	.53	.46	.41	.51	.45	.41	.39
8.0	.52	.43	.38	.51	.43	.38	.50	.42	.37	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.39	.34	.47	.39	.34	.46	.39	.34	.44	.38	.34	.43	.38	.33	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.31	.40	.35	.30	.29

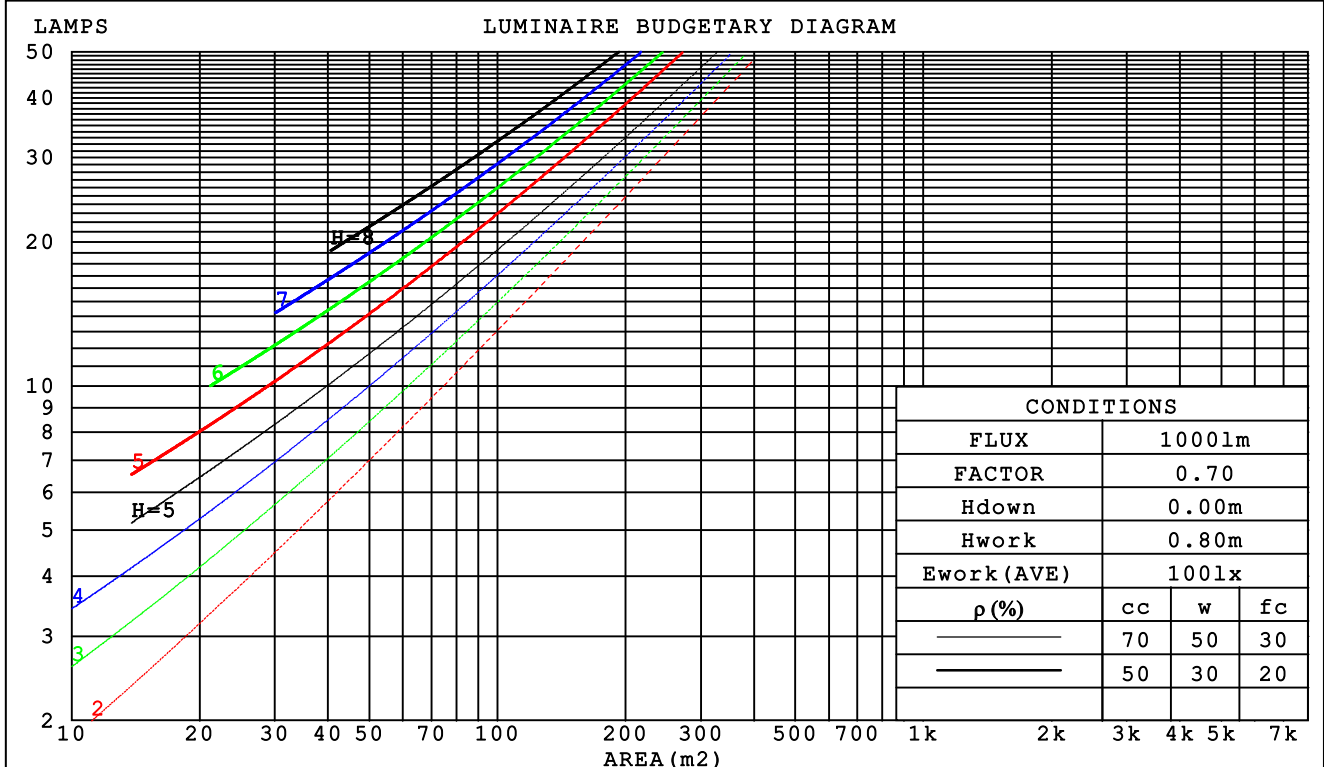

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.261	.148	.047	.253	.144	.046	.240	.137	.044	.227	.131	.042	.215	.125	.040	
2.0	.255	.140	.043	.248	.137	.042	.237	.132	.041	.225	.126	.040	.215	.122	.038	
3.0	.242	.129	.039	.237	.127	.038	.226	.123	.037	.216	.119	.036	.207	.115	.036	
4.0	.228	.119	.035	.223	.117	.035	.214	.114	.034	.205	.110	.033	.197	.107	.033	
5.0	.215	.109	.032	.210	.108	.031	.202	.105	.031	.194	.102	.030	.187	.100	.030	
6.0	.201	.101	.029	.197	.100	.029	.190	.097	.028	.183	.095	.028	.177	.093	.028	
7.0	.189	.094	.027	.186	.093	.026	.179	.091	.026	.173	.089	.026	.167	.087	.025	
8.0	.178	.087	.024	.175	.086	.024	.169	.084	.024	.163	.083	.024	.158	.081	.024	
9.0	.168	.081	.023	.165	.081	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.159	.076	.021	.156	.076	.021	.151	.074	.021	.147	.073	.021	.142	.072	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.186	.166	.148	.159	.142	.127	.109	.098	.088	.063	.057	.051	.020	.018	.017	
2.0	.176	.141	.111	.151	.121	.096	.103	.084	.067	.060	.049	.039	.019	.016	.013	
3.0	.168	.123	.087	.144	.106	.075	.099	.074	.053	.057	.043	.031	.018	.014	.010	
4.0	.160	.109	.070	.137	.094	.061	.094	.066	.043	.055	.038	.025	.018	.013	.008	
5.0	.153	.098	.058	.131	.085	.050	.090	.059	.035	.052	.035	.021	.017	.011	.007	
6.0	.146	.089	.049	.126	.078	.043	.087	.054	.030	.050	.032	.018	.016	.010	.006	
7.0	.140	.082	.042	.120	.071	.037	.083	.050	.026	.048	.030	.016	.016	.010	.005	
8.0	.134	.077	.037	.115	.066	.033	.080	.047	.023	.046	.028	.014	.015	.009	.005	
9.0	.128	.072	.034	.110	.062	.029	.076	.044	.021	.044	.026	.012	.014	.008	.004	
10.0	.122	.067	.030	.106	.058	.027	.073	.041	.019	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

Uncorrected UGR Table

NAME: GU10-6W-瑞丰COB-36V 140mA-2					TYPE:					WEIGHT:				
DIM.:					SPEC.:					SERIAL No.:				
MFR.: MK					SUR.: 0.6325					PROTECTION ANGLE:135				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions	Viewed crosswise					Viewed endwise								
x = 2H y = 2H	11.3	12.7	11.6	12.9	13.1	12.0	13.4	12.3	13.6	13.8				
3H	11.5	12.8	11.8	13.0	13.3	12.6	13.9	12.9	14.1	14.4				
4H	11.5	12.7	11.8	12.9	13.2	12.7	13.9	13.0	14.1	14.4				
6H	11.4	12.5	11.7	12.8	13.1	12.6	13.7	12.9	14.0	14.3				
8H	11.4	12.4	11.7	12.7	13.0	12.6	13.7	12.9	14.0	14.3				
12H	11.3	12.4	11.7	12.7	13.0	12.5	13.6	12.9	13.9	14.2				
4H 2H	11.6	12.8	12.0	13.1	13.4	12.3	13.5	12.6	13.7	14.0				
3H	11.9	13.0	12.3	13.3	13.6	12.9	13.9	13.3	14.2	14.6				
4H	11.9	12.9	12.3	13.2	13.5	13.0	13.9	13.4	14.2	14.6				
6H	11.9	12.7	12.3	13.0	13.4	13.0	13.8	13.4	14.2	14.5				
8H	11.8	12.6	12.2	13.0	13.4	13.0	13.7	13.4	14.1	14.5				
12H	11.8	12.5	12.2	12.9	13.3	12.9	13.6	13.4	14.0	14.4				
8H 4H	11.9	12.6	12.3	13.0	13.4	12.9	13.7	13.3	14.0	14.4				
6H	11.8	12.5	12.3	12.9	13.3	12.9	13.6	13.4	14.0	14.4				
8H	11.8	12.4	12.3	12.8	13.3	12.9	13.5	13.4	13.9	14.4				
12H	11.8	12.2	12.3	12.7	13.2	12.9	13.4	13.4	13.8	14.3				
12H 4H	11.8	12.5	12.3	12.9	13.3	12.9	13.6	13.3	14.0	14.4				
6H	11.8	12.4	12.3	12.8	13.3	12.9	13.4	13.4	13.9	14.3				
8H	11.8	12.3	12.3	12.7	13.2	12.9	13.4	13.4	13.8	14.3				
Variations with the observer position at spacings:														
S = 1.0H	+ 0.6 / - 0.7					+ 0.5 / - 0.5								
1.5H	+ 0.4 / - 0.8					+ 0.4 / - 0.6								
2.0H	+ 0.9 / - 1.2					+ 0.7 / - 0.7								

CIE Pub.117 Corrected 409.4 lm Total Lamp Luminous Flux. (8log(F/F0) = -3.1)

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
Temperature:25.3DEG	Humidity:65.0%
Operators:gg	Test Distance:8.920m [K=1.0000]
Test Date:2013-12-14	Remarks:

UTILIZATION FACTORS TABLE

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	52	45	62	51	45	61	51	45	38
0.80	73	63	56	72	62	56	71	61	55	49
1.00	82	72	66	81	72	65	79	73	65	58
1.25	89	80	74	88	79	73	85	78	72	66
1.50	94	86	79	93	85	79	90	83	78	71
2.00	101	93	88	99	92	87	95	90	85	78
2.50	104	97	92	102	96	91	98	93	89	81
3.00	107	101	96	105	99	95	101	96	93	85
4.00	110	105	102	108	104	100	104	100	97	88
5.00	112	108	105	110	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135

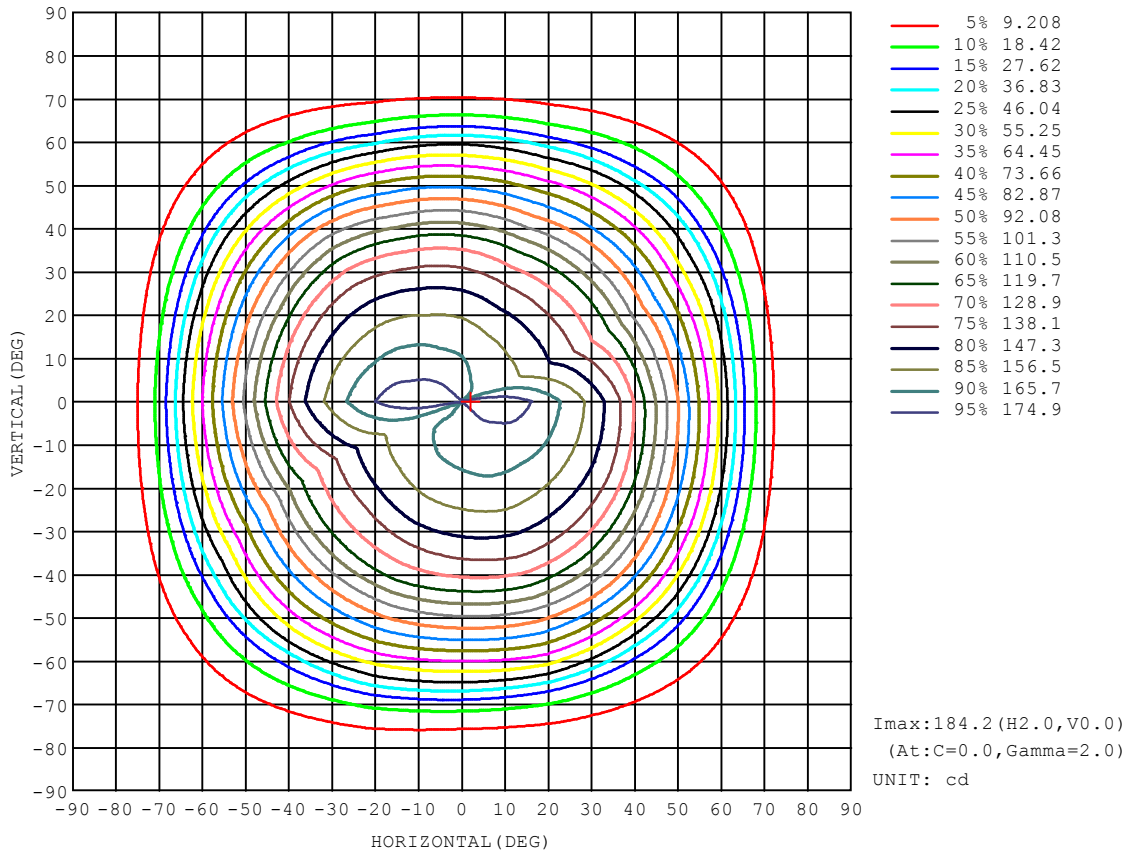


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

AAI Figure

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135

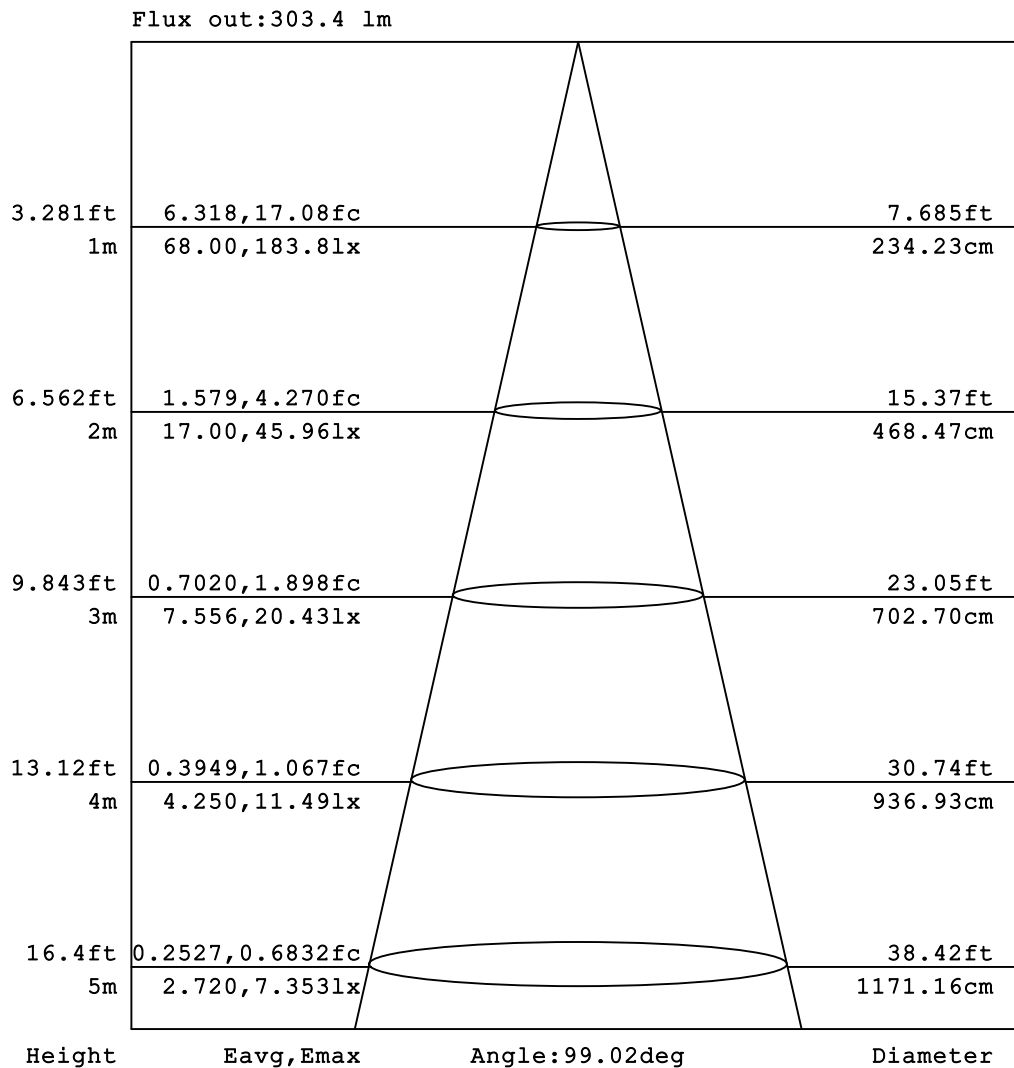


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.:0.6325	PROTECTION ANGLE:135

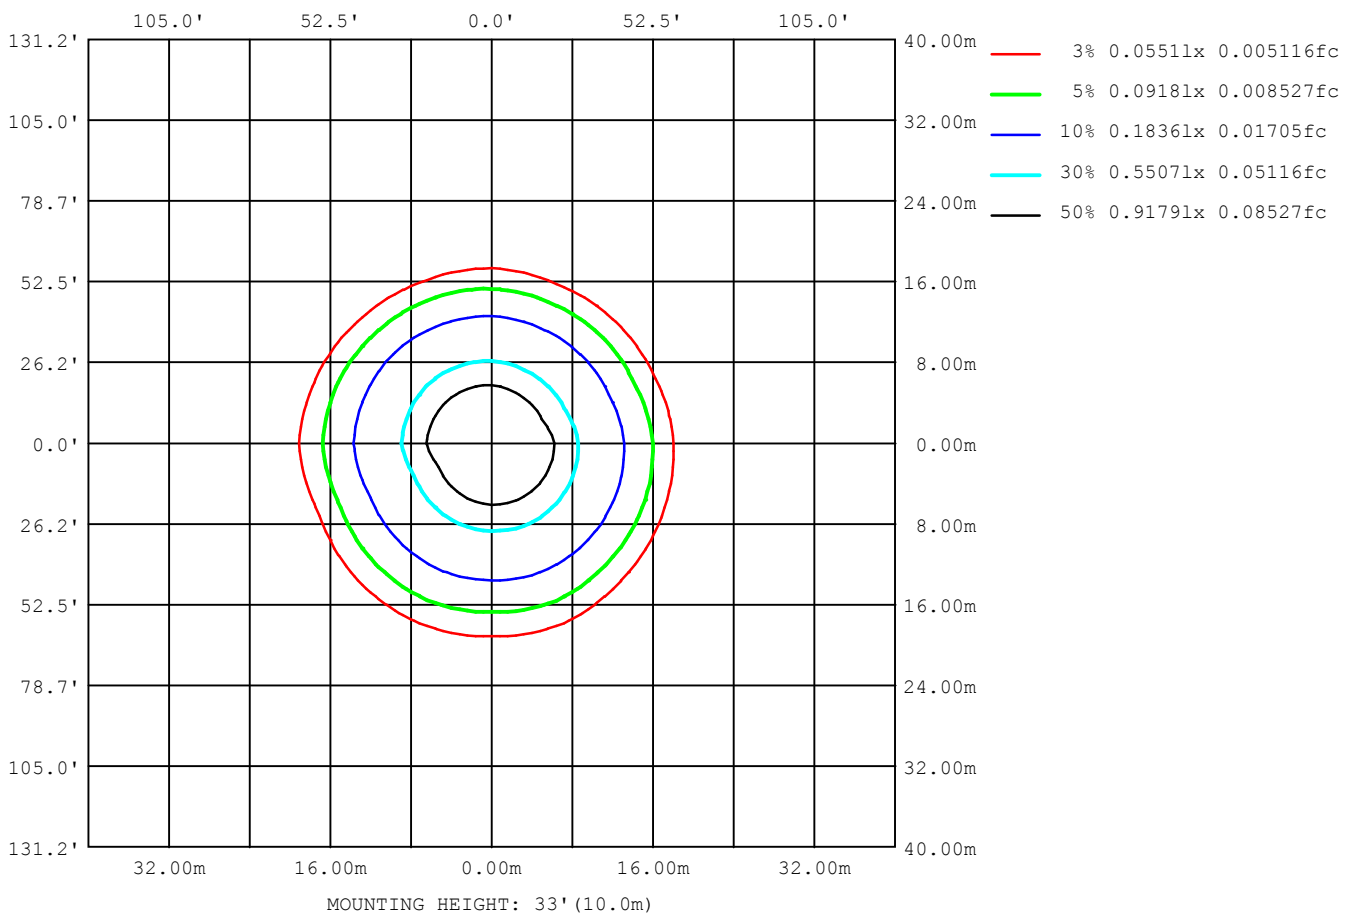

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks:

Planar Illuminance Curve

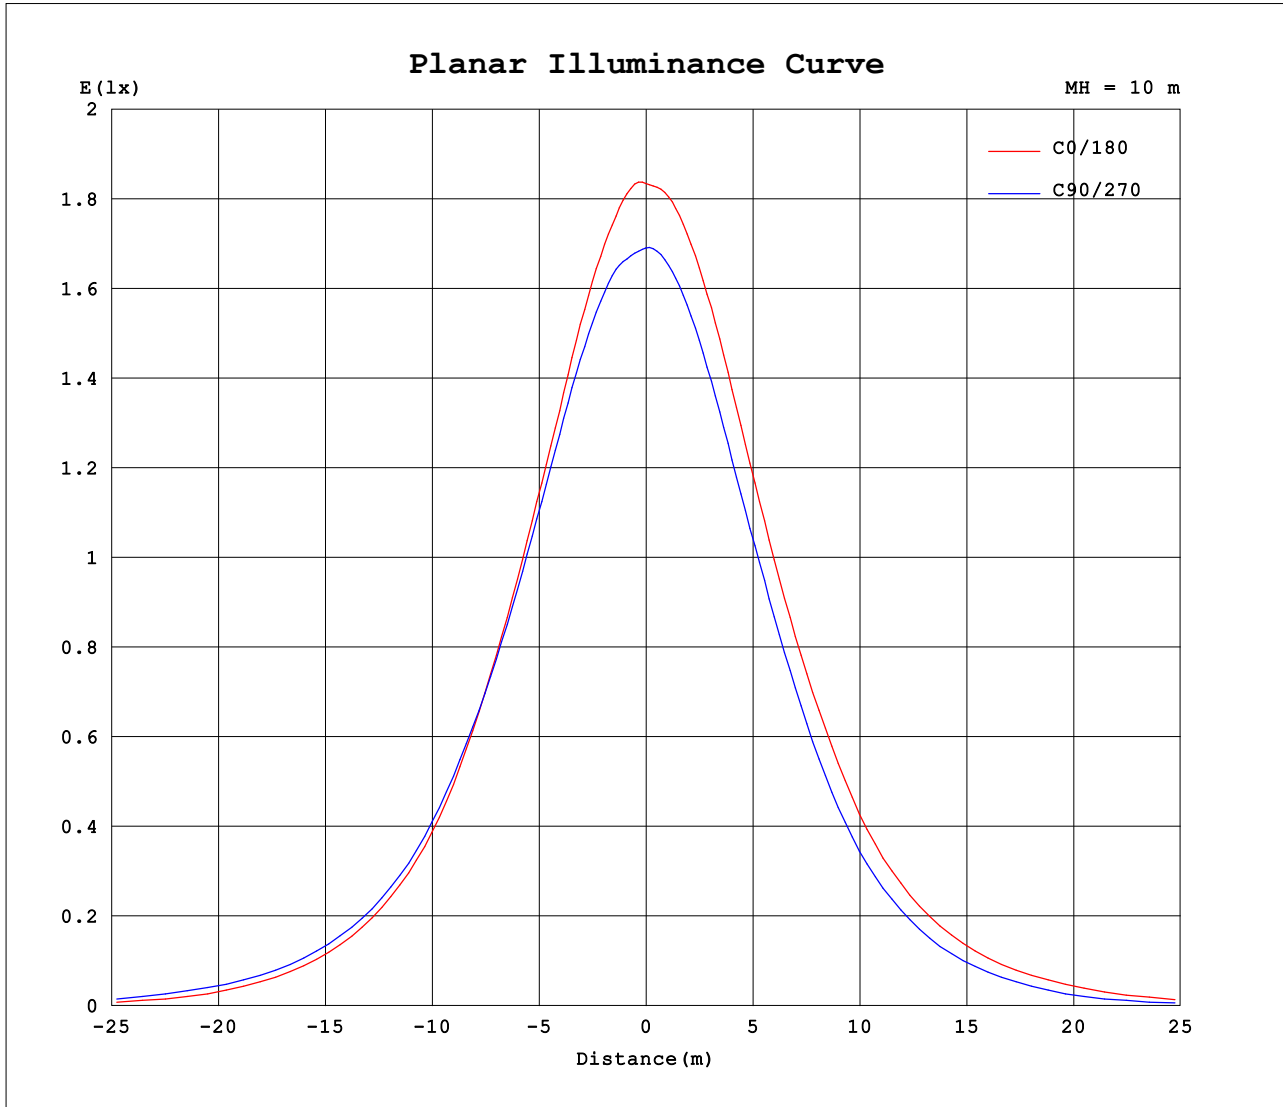

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: gg
 Test Date: 2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 8.920m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: GU10-6W-瑞丰COB-36V 140mA-2	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: MK	SUR.: 0.6325	PROTECTION ANGLE:135

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	184	179	174	171	169	167	166	164	184	179	174	171	169	167	166	164			
5	183	179	175	171	169	167	166	164	184	179	174	171	168	166	165	163			
10	180	176	172	170	169	168	165	163	183	176	172	168	166	163	161	160			
15	176	173	170	168	166	165	162	160	180	173	169	164	162	158	157	156			
20	170	168	166	164	162	160	158	156	175	168	163	158	156	152	150	150			
25	162	161	160	159	156	154	152	149	168	162	157	151	148	144	143	144			
30	153	153	152	152	149	147	143	141	160	154	149	144	140	135	134	135			
35	142	144	144	144	141	138	134	132	150	145	140	133	129	124	124	125			
40	128	131	133	133	130	128	124	121	138	132	127	119	114	109	110	112			
45	110	114	118	119	116	115	111	107	122	115	111	102	98.1	93.2	94.5	96.0			
50	92.1	96.1	101	102	100	98.9	94.9	91.3	103	97.1	92.5	84.5	81.0	77.0	78.5	80.7			
55	73.1	77.4	81.5	85.1	83.4	83.1	79.5	75.5	84.5	78.9	72.2	65.7	62.3	59.4	61.0	63.4			
60	52.4	56.4	60.2	66.4	64.4	65.6	62.3	57.7	64.6	58.2	50.4	44.7	43.9	40.6	42.3	45.0			
65	29.3	32.3	36.7	44.8	45.8	46.9	42.8	39.2	43.4	35.6	27.5	22.7	22.4	20.5	22.6	24.7			
70	13.3	15.0	17.4	22.0	23.6	25.1	23.0	19.8	21.6	16.2	12.8	10.0	9.57	9.29	10.4	12.0			
75	5.70	6.73	8.11	9.90	10.4	12.0	10.6	9.12	9.21	7.10	5.65	4.40	4.10	3.84	4.57	5.11			
80	2.21	2.83	3.55	4.43	4.53	5.21	4.77	3.90	4.03	3.08	2.32	1.66	1.46	1.28	1.53	1.84			
85	0.44	0.70	1.14	1.64	1.74	1.98	1.72	1.30	1.37	0.92	0.50	0.22	0.10	0.09	0.13	0.31			
90	0.06	0.05	0.09	0.20	0.30	0.34	0.28	0.12	0.08	0.05	0.04	0.03	0.05	0.04	0.04	0.04			
95	0.06	0.08	0.05	0.06	0.05	0.06	0.05	0.06	0.04	0.04	0.07	0.03	0.08	0.04	0.08	0.04			
100	0.09	0.12	0.08	0.09	0.05	0.08	0.06	0.10	0.09	0.06	0.12	0.09	0.14	0.08	0.13	0.08			
105	0.15	0.20	0.13	0.15	0.08	0.13	0.10	0.15	0.16	0.12	0.20	0.16	0.22	0.16	0.21	0.16			
110	0.26	0.29	0.19	0.23	0.15	0.21	0.15	0.22	0.25	0.23	0.29	0.27	0.32	0.27	0.31	0.24			
115	0.39	0.41	0.31	0.33	0.25	0.30	0.25	0.33	0.37	0.33	0.42	0.40	0.45	0.40	0.43	0.34			
120	0.55	0.55	0.44	0.45	0.40	0.42	0.39	0.44	0.51	0.47	0.57	0.55	0.59	0.53	0.57	0.49			
125	0.67	0.70	0.57	0.59	0.50	0.54	0.49	0.57	0.65	0.65	0.72	0.67	0.72	0.66	0.69	0.60			
130	0.82	0.83	0.72	0.72	0.65	0.66	0.63	0.69	0.80	0.75	0.84	0.81	0.85	0.78	0.81	0.72			
135	0.94	0.95	0.84	0.85	0.76	0.78	0.73	0.80	0.93	0.91	0.96	0.91	0.95	0.89	0.92	0.83			
140	1.05	1.07	0.96	0.96	0.87	0.90	0.83	0.90	1.04	0.99	1.08	1.01	1.05	0.98	1.01	0.93			
145	1.14	1.15	1.06	1.06	0.97	0.99	0.92	0.99	1.15	1.08	1.15	1.09	1.13	1.06	1.10	1.01			
150	1.18	1.22	1.14	1.12	1.04	1.06	0.99	1.06	1.24	1.15	1.23	1.15	1.20	1.13	1.16	1.08			
155	1.25	1.28	1.16	1.19	1.12	1.14	1.07	1.12	1.31	1.22	1.29	1.22	1.26	1.18	1.21	1.17			
160	1.31	1.34	1.23	1.26	1.16	1.20	1.14	1.19	1.37	1.28	1.33	1.25	1.29	1.23	1.27	1.18			
165	1.38	1.41	1.30	1.32	1.23	1.27	1.21	1.25	1.41	1.32	1.36	1.28	1.32	1.24	1.29	1.24			
170	1.42	1.45	1.33	1.38	1.31	1.33	1.27	1.31	1.47	1.38	1.41	1.31	1.36	1.29	1.32	1.25			
175	1.48	1.49	1.39	1.42	1.34	1.38	1.33	1.33	1.52	1.40	1.45	1.35	1.41	1.31	1.37	1.30			
180	1.49	1.50	1.42	1.43	1.39	1.40	1.33	1.33	1.54	1.47	1.47	1.41	1.41	1.36	1.37	1.32			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:gg
 Test Date:2013-12-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.920m [K=1.0000]
 Remarks: